

JUPITER Chandelier

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Hand-blown 7" Ø clear frosted glass globes
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Cord option is available in various colours
- Head heights are adjustable
- Customizable canopy and fixture head configurations
- 5 year product warranty on LED products
- Rated for damp location



Project

Type

Quantity

Note

PRODUCT CODE	LIGHT SOURCE	CANOPY
JPR3 Jupiter Chandelier - 3 heads - 7" Ø cylinder	COB23W27K90 23W LED 2700K CRI 90+, 2850 nominal lumens COB23W30K90 23W LED 3000K CRI 90+ 3020 nominal lumens COB23W35K90 23W LED 3500K CRI 90+ 3170 nominal lumens COB23W40K90 23W LED 4000K CRI 90+ 3300 nominal lumens	C18 Round canopy 18" Ø x 2" H

CORD	DIMMING	VOLTAGE	FINISH
AGC Anthracite gray cord PWC Pearly white cord SBC Silky black cord SGC Satin gold cord	D010 0-10V 1% dimming LED driver (4 wire) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i> NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 12 Antique gold paint 21 Polished gold plated 22 Brushed gold plated 24 Brushed nickel plated 31 Polished nickel plated

CUSTOM MODIFICATIONS

- Reduced wattage and lumen options available
- 48" stem instead of cord
- More color cord options
- Longer cables available
- Emergency battery pack available
- Dali control protocol or Lutron EcoSystem/3-wire dimming
- Customizable finishes, sizes and LED specifications
- Remote Driver

JUPITER Chandelier

PRODUCT SPECIFICATION



DIMENSIONS & WEIGHT

JPR3 H: 83" W: 18" Ø Net Wt. 14 lbs.

OTHER SPECIFICATIONS

- Standard 72" long color cords are field adjustable (AGC, PWC, SBC, SGC)
- C18/X includes a painted mounting canopy 16" Ø x 2"
- Maximum overall height 83" (field adjustable)


INSTALLATION REQUIREMENTS

- Drivers concealed within canopy
- Mounts to a standard 4" octagonal electrical junction box or plaster ring

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

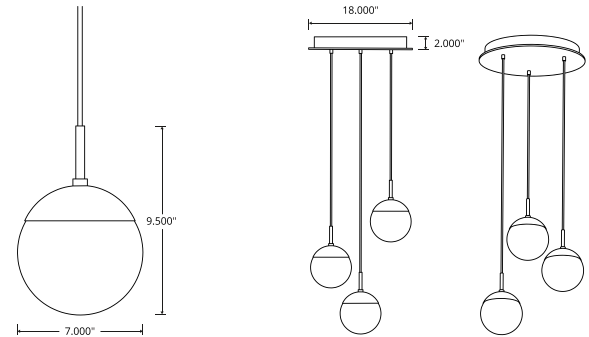

CUSTOM CHANDELIERS

Elevate your space with a chandelier crafted exclusively for you. From bespoke canopy dimensions to impeccably tailored cable lengths and sculptural 3D forms, we design luminous installations that transform your project into a statement of sophistication.



COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming


JUPITER Chandelier

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

COB9W35K90 (PER HEAD)

Nominal LED Source Wattage: 9W
System wattage: 9.98W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 903.6 lm
Luminaire efficacy: 90.5 lm/w



COLOR TEMP. MULTIPLIER

2700K	0.93
3000K	1.97
3500K	1.00
4000K	1.04