

JUPITER Suspension

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Hand-blown 7" Ø clear frosted glass globe
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Multiple plated & painted finishes
- Cord option is available in various colours
- Chandelier available with multiple heads
- LED available with multiple dimming options
- Fixture height is adjustable
- Available with 2 canopy options
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	

PRODUCT CODE	LIGHT SOURCE	CORD	CANOPY / REMOTE DRIVER
JPS Jupiter Suspension H: 9.5" x W: 7" Ø	COB9W27K90 9W LED 2700K CRI 90+ 1025 nominal lumens	AGC Anthracite gray cord	RC Round Canopy 5" Ø X 0.625" (driver in junction box)
	COB9W30K90 9W LED 3000K CRI 90+ 1087 nominal lumens	PWC Pearly white cord	REM-MC Remote driver with micro 2" Ø canopy
	COB9W35K90 9W LED 3500K CRI 90+ 1141 nominal lumens	SBC Silky black cord	REM-RC Remote driver with Round Canopy 5" Ø X 0.625"
	COB9W40K90 9W LED 3500K CRI 90+ 1141 nominal lumens	SGC Satin gold cord	
	9W LED 4000K CRI 90+ 1187 nominal lumens		
! REMOTE DRIVER OPTION Remote driver option requires a separate remote box. Referes to REM spec sheet.			

DIMMING	VOLTAGE	FINISH
D010 0-10V 1% dimming LED driver (4 wire)	120V/277V 120V-277V Universal voltage electronic LED driver	01 White paint
PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i>	120V Electronic LED driver (PHS Phase dimming)	02 Black paint
NODIM No dimming option required		08 Dark mat bronze paint
		12 Antique gold paint
		21 Polished gold plated
		22 Brushed gold plated
		24 Brushed nickel plated
		31 Polished nickel plated
		33 Black polished nickel plated

CUSTOM MODIFICATIONS

- Longer cable available
- More color cord options
- 48" stem instead of cord
- Dim to Warm option available
- Emergency battery pack available
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Customizable finishes, sizes and LED specifications
- Remote driver

JUPITER Suspension

PRODUCT SPECIFICATION



DIMENSIONS & WEIGHT

JPS H: 9.5" W: 7" Ø Net Wt. 4 lbs.

OTHER SPECIFICATIONS

- Standard 72" long color cord is field adjustable (AGC, PWC, SBC, SGC)
- Standard canopy size is 5" Ø x 0.63" H (except for REM-MC)
- Canopy size for REM-MC option is 2" Ø x 0.25" H
- Maximum overall height 81.5" (field adjustable)
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box (except for remote option)
- Mounts to a standard 4" octagonal electrical junction box or plaster ring (except for remote options)
- REM-MC canopy option requires a 1.375" Ø hole, ceiling thickness up to 1"

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

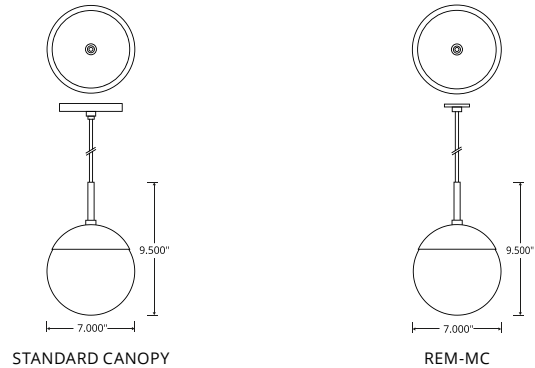

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming


JUPITER Suspension

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

COB9W35K90

Nominal LED Source Wattage: 9W
System wattage: 9.9W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 903.6 lm
Luminaire efficacy: 91.2 lm/w



COLOR TEMP. MULTIPLIER

2700K	0.90
3000K	0.95
3500K	1.00
4000K	1.04