

MIA Chandelier

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Solid clear frosted acrylic diffusers available in multiple lengths
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Cord option is available in coaxial cable or a multitude of color cords
- Chandelier available with standard sizes and multiple head configurations
- Head heights are adjustable
- Customizable canopy and fixture head configurations
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	

PRODUCT CODE				LIGHT SOURCE		CORD	
MIR3SM	3 heads - Small head (7.5")	MIR7SM	7 heads - Small head (7.5")	COB9027K	Per head: 5W LED 2700K CRI 90+ 640 nominal lumens	COC	Coaxial cable
MIR3MD	3 heads - Med. head (11")	MIR7MD	7 heads - Med. head (11")			AGC	Anthracite gray cord
MIR3LG	3 heads - Long head (17")	MIR7LG	7 heads - Long head (17")				Pearly white cord
MIR4SM	4 heads - Small head (7.5")	MIR9SM	9 heads - Small head (7.5")	COB9030K	Per head: 5W LED 3000K CRI 90+ 679 nominal lumens	PWC	Silky black cord
MIR4MD	4 heads - Med. head (11")	MIR9MD	9 heads - Med. head (11")			SBC	Satin gold cord
MIR4LG	4 heads - Long head (17")	MIR9LG	9 heads - Long head (17")				
MIR5SM	5 heads - Small head (7.5")	MIR13SM	13 heads - Small head (7.5")	COB9040K	Per head: 5W LED 4000K CRI 90+ 741 nominal lumens	SGC	
MIR5MD	5 heads - Med. head (11")	MIR13MD	13 heads - Med. head (11")				
MIR5LG	5 heads - Long head (17")	MIR13LG	13 heads - Long head (17")				

CANOPY		DIMMING		VOLTAGE		FINISH	
C7	Round canopy 7" Ø x 0.5" H <i>Compatible with MIR3</i>	D010	0-10V 1% dimming LED driver (4 wires)	120V/277V	120V-277V Universal voltage electronic LED driver	01	White paint
C12	Round canopy 12" Ø x 1.5" H <i>Compatible with MIR3 or MIR5</i>	PHS	Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i>	120V	Electronic LED driver (PHS Phase dimming)	02	Black paint
C18	Round canopy 18" Ø x 2" H <i>Compatible with MIR7, MIR9 or MIR13</i>	NODIM	No dimming option required			08	Dark mat bronze paint
S7	Square canopy 7.75" x 7.75" x 1.5" <i>Compatible with MIR4 or MIR5</i>					12	Antique gold paint
S12	Square canopy 12" x 12" x 1.5" <i>Compatible with MIR5 or MIR9</i>					21	Polished gold plated
						22	Brushed gold plated
						24	Brushed nickel plated
						31	Polished nickel plated

CUSTOM MODIFICATIONS


- Customizable head selection with MX option
- Reduced wattage and lumen options available
- Custom length acrylics
- 48" stems instead of cords
- Dali control protocol or Lutron EcoSystem/3-wire dimming
- Custom sizes, configuration, finishes and lamping
- Remote driver

MIA Chandelier

PRODUCT SPECIFICATION



TECHNICAL DRAWING(S)

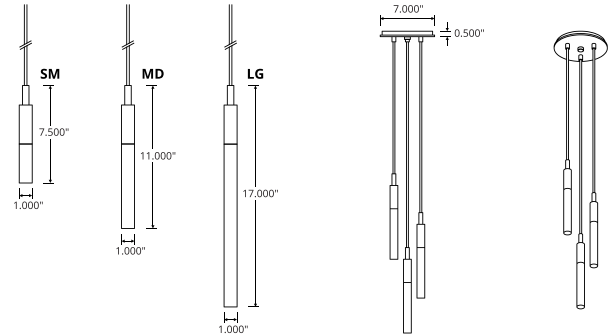

DIMENSIONS & WEIGHT

MIR3-C7/3	H: 57" to 67" W: 7" Ø Net Wt. 4 to 6 lbs.
MIR3-C12/3	H: 58" to 68" W: 12" Ø Net Wt. 7 to 8 lbs.
MIR5-C12/5	H: 58" to 68" W: 12" Ø Net Wt. 8 to 11 lbs.
MIR7-C18/7	H: 58" to 68" W: 18" Ø Net Wt. 15 to 18 lbs.
MIR9-C18/9	H: 58" to 68" W: 18" Ø Net Wt. 16 to 21 lbs.
MIR13-C18/13	H: 58" to 68" W: 18" Ø Net Wt. 19 to 26 lbs.
MIR4-S7/4	H: 58" to 68" W (A): 7.75" W (B): 7.75" Net Wt. 6 to 8 lbs.
MIR5-S7/5	H: 58" to 68" W (A): 7.75" W (B): 7.75" Net Wt. 7 to 10 lbs.
MIR5-S12/5	H: 58" to 68" W (A): 12" W (B): 12" Net Wt. 11 to 13 lbs.
MIR9-S12/9	H: 58" to 68" W (A): 12" W (B): 12" Net Wt. 14 to 19 lbs.

OTHER SPECIFICATIONS


- Solid 1" Ø acrylic diffusers (MIR_SM = 3") - (MIR_MD = 6.5") - (MIR_LG = 12.5")
- Dual conductor coated coaxial class 2 adjustable cables 3/32" Ø X 72" (COC)
- Standard 72" long color cords are field adjustable (AGC, PWC, SBC, SGC)
- C7 includes a painted mounting canopy 6.5" Ø x 0.5"
- C12 includes a painted mounting canopy 10" Ø x 1.5"
- C18 includes a painted mounting canopy 16" Ø x 2"
- S7 includes a painted mounting canopy 7" x 7" x 1.5"
- S12 includes a painted mounting canopy 10.5" x 10.5" x 1.5"
- Standard overall heights: (MIR_SM = 81") - (MIR_MD = 85") - (MIR_LG = 91") - except for C7 option
- UL Certified and suitable for damp location

INSTALLATION REQUIREMENTS

- Driver(s) concealed within canopy (except for C7 option)
- Driver to be fitted in junction box for C7 option
- Mounts to a standard 4" octagonal electrical junction box or plaster ring

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

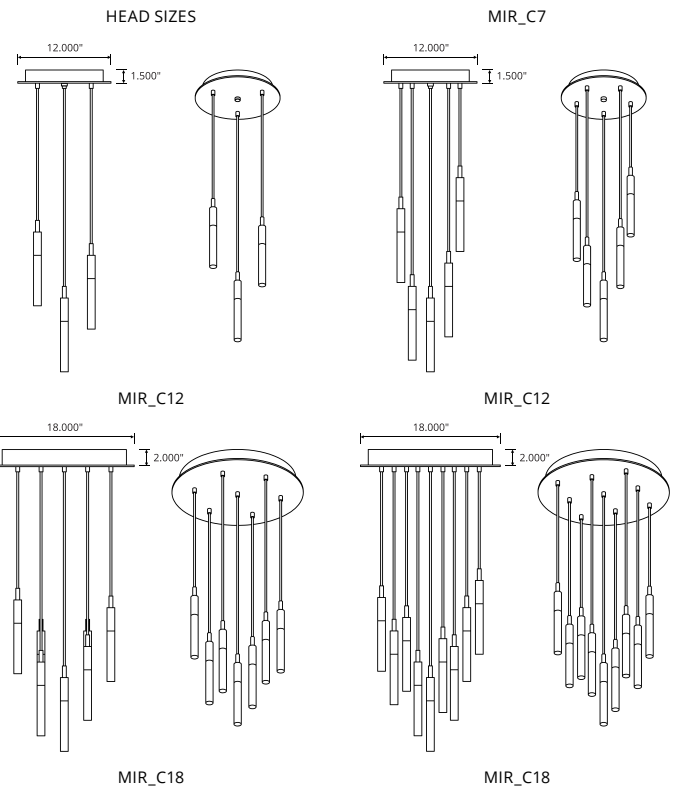


COMPATIBLE DIMMER LIST


Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming

MIA Chandelier


PRODUCT SPECIFICATION




MIR_C18




MIR_S7



MIR_S7



MIR_S12



MIR_S12

CUSTOM CHANDELIERS

Elevate your space with a chandelier crafted exclusively for you. From bespoke canopy dimensions to impeccably tailored cable lengths and sculptural 3D forms, we design luminous installations that transform your project into a statement of sophistication.



MIA Chandelier


PRODUCT SPECIFICATION

PHOTOMETRIC DATA

COB5W9035K (SM)

Nominal LED Source Wattage: 5W
System wattage: 6.22W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 292 lm
Luminaire efficacy: 46.9 lm/w


Delivered Lumens: 292 lm
System Wattage: 6.22 W
Luminaire Efficacy: 46.9 lm/W



COB5W9035K (MD)

Nominal LED Source Wattage: 5W
System wattage: 6.05W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 314.9 lm
Luminaire efficacy: 52.1 lm/w

Delivered Lumens: 314.9 lm
System Wattage: 6.05 W
Luminaire Efficacy: 52.1 lm/W



COLOR TEMP. MULTIPLIER

2700K	0.90
3000K	0.95
3500K	1.00
4000K	1.04