

MONACO Ceiling Fixture

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Multiple shade options with encapsulated fabrics and materials in high performance resin
- LED engine CRI 90+ available in 2700K | 3000K | 3500K
- White acrylic diffuser at bottom of shade
- LED available with multiple dimming options
- 5 year product warranty on LED products
- Rated for damp location



Project

Type

Quantity

Note

PRODUCT CODE	LIGHT SOURCE
MOCM2005 Monaco Ceiling Fixture - 20.5"Ø X 5" H Shade MOCM2009 Monaco Ceiling Fixture - 20.5"Ø X 9" H Shade MOCM3007 Monaco Ceiling Fixture - 30"Ø X 7" H Shade MOCM3013 Monaco Ceiling Fixture - 30"Ø X 13" H Shade MOCM4210 Monaco Ceiling Fixture - 42"Ø X 10" H Shade MOCM4218 Monaco Ceiling Fixture - 42"Ø X 18" H Shade MOCM4812 Monaco Ceiling Fixture - 48"Ø X 12" H Shade MOCM4821 Monaco Ceiling Fixture - 48"Ø X 21" H Shade <i>* Shades 42"Ø and larger must be mounted or supported independently of an electrical junction box</i>	LED28W27K90 28W LED 2700K CRI 90+ 3148 nominal lumens LED28W30K90 28W LED 3000K CRI 90+ 3148 nominal lumens LED28W35K90 28W LED 3500K CRI 90+ 3590 nominal lumens LED43W27K90 89W LED 2700K CRI 90+ 4723 nominal lumens LED43W30K90 89W LED 3000K CRI 90+ 4723 nominal lumens LED43W35K90 89W LED 3500K CRI 90+ 5385 nominal lumens MB 3 X 60W 120V Type A-19 incandescent E26 medium base or LED screw-in equivalent (bulbs not included)

SHADE	DIMMING	VOLTAGE	FINISH
AC White satin finish acrylic KN Imago progeny blonde encapsulated fabric KW Lintel white encapsulated linen OL Oyster white linen SW Sand dollar white encapsulated linen TB Tri-lam vinyl coated cream linen	D010 0-10V 1% dimming LED driver (4 wire) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i> NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 21 Polished gold plated 22 Brushed gold plated 24 Brushed nickel plated 31 Polished nickel plated

CUSTOM MODIFICATIONS


- Customizable finishes, sizes and LED specifications
- Emergency battery pack available
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Remote driver options available

MONACO Ceiling Fixture

PRODUCT SPECIFICATION



TECHNICAL DRAWING(S)

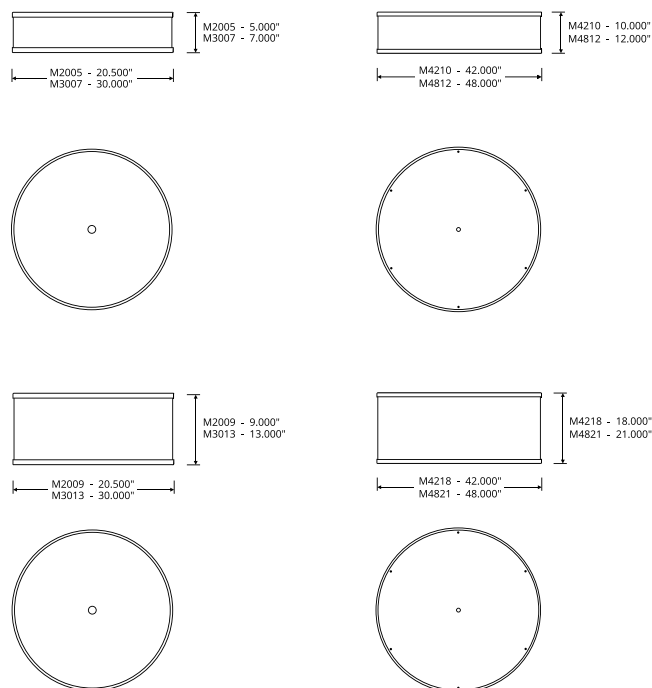

DIMENSIONS & WEIGHT

MOCM2005	H: 5" W: 20.5" Net Wt. 10 lbs.
MOCM2009	H: 9" W: 20.5" Net Wt. 14 lbs.
MOCM3007	H: 7" W: 30" Net Wt. 27 lbs.
MOCM3013	H: 13" W: 30" Net Wt. 32 lbs.
MOCM4210	H: 10" W: 42" Net Wt. 69 lbs.*
MOCM4218	H: 18" W: 42" Net Wt. 73 lbs.*
MOCM4812	H: 12" W: 48" Net Wt. 86 lbs.*
MOCM4821	H: 21" W: 48" Net Wt. 100 lbs.*

* Shades 42"Ø and larger must be mounted or supported independently of an electrical junction box

OTHER SPECIFICATIONS

- Canopy size 5" Ø
- UL Certified and suitable for damp location

INSTALLATION REQUIREMENTS

- Shades 42" Ø & larger must be mounted or supported independently of an electrical junction box
- Mounts to a standard 4" octagonal electrical junction box or plaster ring
- Driver concealed within shade

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- Consistent binning that falls within 3 MacAdam ellipse
- LED Life, L70 > 84 700 hrs at 70% lumen maintenance
- Integral Class II driver concealed within shade
- Thermally managed within manufacturer specifications to maximize LED life
- Field replacement for LED module and driver is simple & requires minimal effort
- LED module made in Canada
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant
- All photometric tests are run with AC white satin finish acrylic

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming