

NEPTUNE Ceiling Fixture

PRODUCT ORDERING CODE



PRODUCT FEATURES

- 4" Ø frosted or clear glass globe
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Magnetic canopy with no apparent fastener offered in 2 size options
- Customizable sizes, finishes and LED specifications
- 5 year product warranty on LED products
- Rated for damp location



Project

Type

Quantity

Note

PRODUCT CODE	LIGHT SOURCE	GLASS
NPC Neptune Ceiling Fixture	COB3W27K90 3W LED 2700K CRI 90+ 308 nominal lumens COB3W30K90 3W LED 3000K CRI 90+ 326 nominal lumens COB3W35K90 3W LED 3500K CRI 90+ 342 nominal lumens COB3W40K90 3W LED 4000K CRI 90+ 356 nominal lumens	CFG Frosted glass CPG Clear glass

CANOPY	DIMMING	VOLTAGE	FINISH
CM 5" Ø X 0.25" magnetic canopy (driver in junction box) REM-CNM Remote driver with micro 2" Ø canopy REM-MCC Remote driver with Round Canopy 5" Ø X 0.625" ⚠ REMOTE DRIVER OPTION Remote driver option requires a separate remote box. Referes to REM spec sheet.	D010 0-10V 1% dimming LED driver (4 wire) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) (only available in 120V) NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 12 Antique gold paint 21 Polished gold plated 22 Brushed gold plated 24 Brushed nickel plated 31 Polished nickel plated 33 Black polished nickel plated

✂ CUSTOM MODIFICATIONS

- Customizable finishes, sizes and LED specifications

NEPTUNE Ceiling Fixture

PRODUCT SPECIFICATION



DIMENSIONS & WEIGHT

NPC H: 5.5" W: 4" Net Wt. 2 lbs.

OTHER SPECIFICATIONS

- Standard canopy size is 5" Ø x 0.25" H (except for REM-MCC)
- Canopy size for REM-MCC option is 2" Ø x 0.25" H
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box (except for remote options)
- Mounts to a standard 4" octagonal electrical junction box or plaster ring (except for remote options)
- REM-MCC canopy option requires a 1.375" Ø hole, ceiling thickness up to 1"


LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

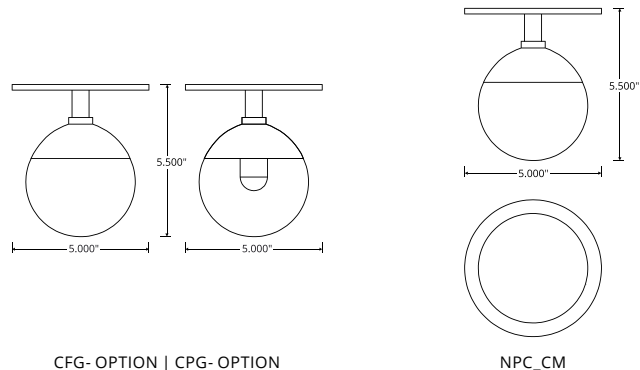

CFG- OPTION | CPG- OPTION



NPC_REM-MCC

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming


NEPTUNE Ceiling Fixture

PRODUCT SPECIFICATION

PHOTOMETRIC DATA


COB3W35K90 (CFG)

Nominal LED Source Wattage: 3W
System wattage: 3.5W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 241 lm
Luminaire efficacy: 68.7 lm/w



COB3W35K90 (CPG)

Nominal LED Source Wattage: 3W
System wattage: 3.5W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 245 lm
Luminaire efficacy: 69.8 lm/w



COLOR TEMP. MULTIPLIER

2700K	0.90
3000K	0.95
3500K	1.00
4000K	1.04