

PASTIS Chandelier

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Hand-blown white opal satin glass shades 6.5" Ø x 3.25" H
- LED engine CRI 90+ available in 2700K | 3000K | 3500K
- Cord option is available in various colours
- Head heights are adjustable
- Customizable canopy and fixture head configurations
- 5 year product warranty on LED products
- Rated for damp location

Project

Type

Quantity

Note



PRODUCT CODE		LIGHT SOURCE		CANOPY	
PAR3	Pastis Chandelier 3 heads	LED27W27K90	27W LED 2700K CRI 90+ 3825 nominal lumens	C18	Round canopy 18" Ø x 2" H <i>Compatible with PAR3</i>
		LED27W30K90	27W LED 3000K CRI 90+ 3930 nominal lumens		
		LED27W35K90	27W LED 3500K CRI 90+ 3945 nominal lumens		

CORD		DIMMING		VOLTAGE		FINISH	
AGC	Anthracite gray cord	D010	0-10V 1% dimming LED driver (4 wire)	120V/277V	120V-277V Universal voltage electronic LED driver	01	White paint
PWC	Pearly white cord	PHS	Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i>	120V	Electronic LED driver (PHS Phase dimming)	02	Black paint
SBC	Silky black cord					08	Dark mat bronze paint
SGC	Satin gold cord					12	Antique gold paint
						21	Polished gold plated
		22	Brushed gold plated				
		NODIM	No dimming option required			24	Brushed nickel plated
						31	Polished nickel plated

CUSTOM MODIFICATIONS

- Reduced wattage and lumen options available
- 48" stems instead of cords
- More color cord options
- Longer cables available
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Customizable finishes, sizes and LED specifications
- Remote driver

PASTIS Chandelier

PRODUCT SPECIFICATION



DIMENSIONS & WEIGHT

PAR3 H: 77" W: 18" Ø Net Wt. 11 lbs.

OTHER SPECIFICATIONS

- Standard 72" long color cords are field adjustable (AGC, PWC, SBC, SGC)
- C18 includes a painted mounting canopy 16" Ø x 2"
- Maximum overall height 77" (field adjustable)
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Drivers concealed within canopy
- Mounts to a standard 4" octagonal electrical junction box or plaster ring

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- Consistent binning that falls within 3 MacAdam ellipse
- LED Life, L70 > 60 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

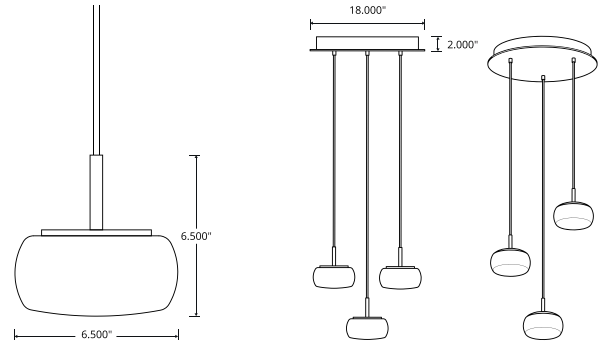

CUSTOM CHANDELIERS

Elevate your space with a chandelier crafted exclusively for you. From bespoke canopy dimensions to impeccably tailored cable lengths and sculptural 3D forms, we design luminous installations that transform your project into a statement of sophistication.



COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming


PASTIS Chandelier

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

LED9W35K90 (PER HEAD)

Nominal LED Source Wattage: 9W
System wattage: 11.3W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 907.4 lm
Luminaire efficacy: 80.0 lm/w



COLOR TEMP. MULTIPLIER

2700K	0.96
3000K	0.98
3500K	1.00
4000K	1.04