

STIXX MACRO Wall Sconce

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Simple wall sconce offering up and down light
- Solid 2" Ø aluminum cylinder offering performance and versatility
- CREE COB available in 2700K | 3000K | 3500K | 4000K
- CREE COB available in 80CRI | 90CRI | 95CRI with reflectors 26° | 60°
- ADA compliant
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	

PRODUCT CODE		LIGHT SOURCE	
SADRP	Stixx Macro Rectangular Wall Sconce - 7" H X 3" W X 3" P	COB9W27K80	9W LED 2700K CRI 80+ 1212 nominal lumens
SADSP	Stixx Macro Square Wall Sconce - 7" H X 5" W X 3" P	COB9W27K90	9W LED 2700K CRI 90+ 1025 nominal lumens
		COB9W27K95	9W LED 2700K CRI 95+ 889 nominal lumens
		COB9W30K80	9W LED 3000K CRI 80+ 1263 nominal lumens
		COB9W30K90	9W LED 3000K CRI 90+ 1087 nominal lumens
		COB9W30K95	9W LED 3000K CRI 95+ 943 nominal lumens
		COB9W35K80	9W LED 3500K CRI 80+ 1304 nominal lumens
		COB9W35K90	9W LED 3500K CRI 90+ 1141 nominal lumens
		COB9W35K95	9W LED 3500K CRI 95+ 980 nominal lumens
		COB9W40K80	9W LED 4000K CRI 80+ 1341 nominal lumens
		COB9W40K90	9W LED 4000K CRI 90+ 1187 nominal lumens
		COB9W40K95	9W LED 4000K CRI 95+ 1018 nominal lumens


OPTIC	DIMMING	VOLTAGE	FINISH
ADM No reflector - Frosted polycarbonate diffusing lens	D010 0-10V 1% dimming LED driver (4 wire)	120V/277V 120V-277V Universal voltage electronic LED driver	01 White paint
26M 26° angle reflector	PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) (only available in 120V)	120V Electronic LED driver (PHS Phase dimming)	02 Black paint
60M 60° angle reflector	NODIM No dimming option required		08 Dark mat bronze paint
			12 Antique gold paint
			21 Polished gold plated
			22 Brushed gold plated
			24 Brushed nickel plated
			31 Polished nickel plated

CUSTOM MODIFICATIONS

- Emergency battery pack available
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Customizable finishes, sizes and LED specification
- Remote driver

STIXX MACRO Wall Sconce

PRODUCT SPECIFICATION

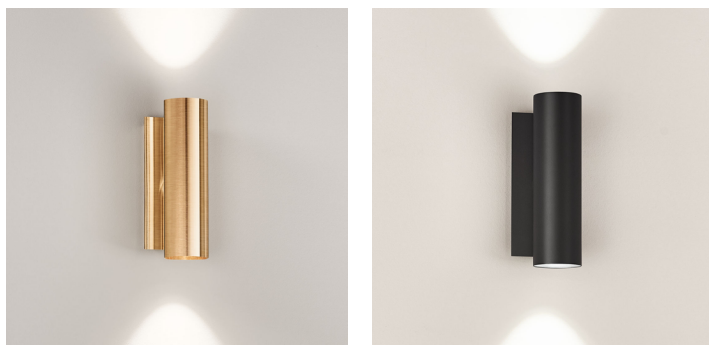

DIMENSIONS & WEIGHT

SADRP H: 7" W: 3" P: 3" Net Wt. 3 lbs.
SADSP H: 7" W: 5" P: 3" Net Wt. 3 lbs.

OTHER SPECIFICATIONS

- Center of electrical junction box to top of fixture vertical mount 3.5"
- Canopy size (SP = 4.5" H X 4.5" W) - (RP = 2.5" H X 5.5" W)
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- SADSP back plate option mounts to a standard 4" octagonal electrical junction box or plaster ring
- SADRP back plate option mounts to a switch box (minimum switch box dimensions = 2.25" W X 2.5" D)
- Driver to be fitted in junction box (except for remote options)

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

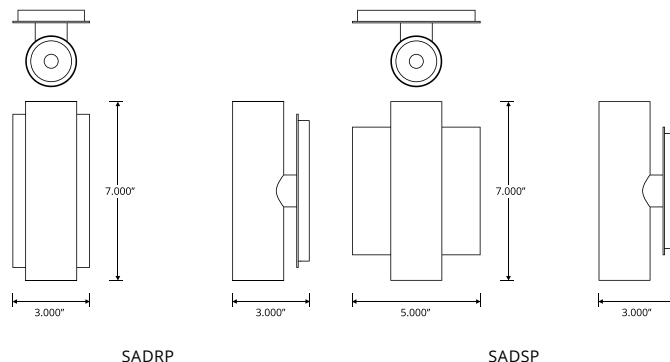

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming


STIXX MACRO Wall Sconce

PRODUCT SPECIFICATION

PHOTOMETRIC DATA


COB9W35K90 26M

Nominal LED Source Wattage: 9W
System wattage: 9.8W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 867.5 lm
Luminaire efficacy: 87.8 lm/w




COB9W35K90 60M

Nominal LED Source Wattage: 9W
System wattage: 9.8W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 890.9 lm
Luminaire efficacy: 90 lm/w



COB9W9035K ADM

Nominal LED Source Wattage: 9W
System wattage: 9.8W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 890.9 lm
Luminaire efficacy: 40.8 lm/w



COLOR TEMP. MULTIPLIER

CCT	80CRI	90CRI	95CRI
2700K	1.06	0.90	0.78
3000K	1.11	0.95	0.83
3500K	1.14	1.00	0.86
4000K	1.17	1.04	0.89