


STIXX GLOW Micro-Suspension

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Vibrant 1" Ø aluminum cylinder with illuminated frosted acrylic offering of stylish glow
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Product is offered in 3 standard sizes
- Chandelier available with multiple heads and customizable canopy in various shapes and sizes
- Cord option is available in coaxial cable or a multitude of color cords
- Fixture height is adjustable
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	

PRODUCT CODE	LIGHT SOURCE	CORD	CANOPY / REMOTE DRIVER
SGMSM Small Stixx Glow 1" Ø X 12" H Cylinder	COB5W27K90 5W LED 2700K CRI 90+ 640 nominal lumens	COC Coaxial cable	RC Round Canopy 5" Ø X 0.625" (driver in junction box)
SGMMD Medium Stixx Glow 1" Ø X 19" H Cylinder	COB5W30K90 5W LED 3000K CRI 90+ 679 nominal lumens	AGC Anthracite gray cord	RCX Round Canopy 5" Ø X 0.625" for coaxial cable (driver in junction box)
SGMLG Long Stixx Glow 1" Ø X 27" H Cylinder	COB5W35K90 5W LED 3500K CRI 90+ 713 nominal lumens	PWC Pearly white cord	REM-RC Remote driver with round Canopy 5" Ø X 0.625"
	COB5W40K90 5W LED 4000K CRI 90+ 741 nominal lumens	SBC Silky black cord	REM-RCX Remote driver with round Canopy 5" Ø X 0.625" for coaxial cable
		SGC Satin gold cord	REM-MC Remote driver with micro 2" Ø canopy
			REM-MCX Remote driver with micro 2" Ø canopy for coaxial cable
ⓘ REMOTE DRIVER OPTION Remote driver option requires a separate remote box. Refers to REM spec sheet.			

DIMMING	VOLTAGE	CANOPY FINISH
D010 0-10V 1% dimming LED driver (4 wire)	120V/277V 120V-277V Universal voltage electronic LED driver	01 White paint
PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) - (only available in 120V)	120V Electronic LED driver (PHS Phase dimming)	02 Black paint
NODIM No dimming option required		08 Dark mat bronze paint
		12 Antique gold paint
		25 Brushed aluminum
		31 Polished nickel plated

STIXX GLOW Micro-Suspension

PRODUCT SPECIFICATION



DIMENSIONS & WEIGHT

- SGMSM** H: 12" W: 1" Net Wt. 2 lbs.
SGMMD H: 19" W: 1" Net Wt. 4 lbs.
SGMLG H: 27" W: 1" Net Wt. 6 lbs.

OTHER SPECIFICATIONS

- Solid clear frosted 1" Ø acrylic diffuser is 1" Ø X 3"
- Dual conductor coated coaxial class 2 adjustable cable 3/32" Ø X 72" (COC)
- Standard 72" long color cord is field adjustable (AGC, PWC, SBC, SGC)
- Standard canopy size is 5" Ø x 0.63" H (except for REM-MC or REM-MCX)
- Canopy size for REM-MCX option is 2" Ø x 0.25" H
- Overall heights (SM = 85") - (MD = 92") - (LG = 100")
- UL Certified and suitable for damp location

INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box (except for remote options)
- Mounts to a standard 4" octagonal electrical junction box or plaster ring (except for remote options)
- REM-MC canopy option requires a 1.375" Ø hole, ceiling thickness up to 1"

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant


CUSTOM MODIFICATIONS

- Custom length acrylic
- Longer cable available, more color cord options or 48" stem instead of cord
- Dali control protocol
- Customizable finishes, sizes and LED specifications
- Remote driver

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming

TECHNICAL DRAWING(S)

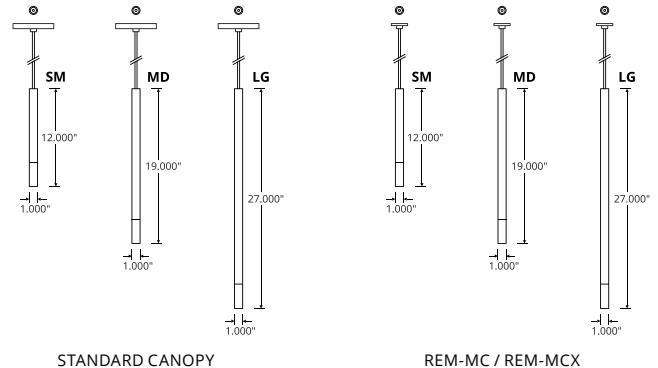


STIXX GLOW

Micro-Suspension

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

COB5W35K90
Nominal LED Source Wattage: 5W
System wattage: 6.22W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 292 lm
Luminaire efficacy: 46.9 lm/w

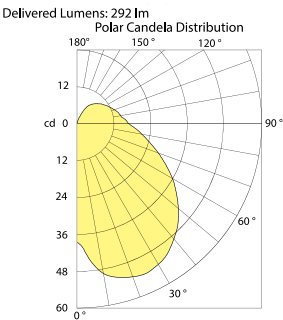

COLOR TEMP. MULTIPLIER	
2700K	0.90
3000K	0.95
3500K	1.00
4000K	1.04