


STIXX NANO Chandelier

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Metal cylinders 0.5" Ø
- LED engine CRI 90+ available in 2700K | 3000K | 3500K
- Chandelier available with standard sizes and multiple head configurations
- Head heights are adjustable
- Customizable canopy and fixture head configurations
- 5 year product warranty on LED products
- Rated for damp location

Project

Type

Quantity

Note



PRODUCT CODE				LIGHT SOURCE	
SNR3SM	3 heads - Small cylinder (12")	SNR7SM	7 heads - Small cylinder (12")	LED9027K	Per head: 2W LED 2700K CRI 90+ 310 nominal lumens
SNR3MD	3 heads - Medium cylinder (16")	SNR7MD	7 heads - Medium cylinder (16")	LED9030K	Per head: 2W LED 3000K CRI 90+ 320 nominal lumens
SNR3LG	3 heads - Long cylinder (20")	SNR7LG	7 heads - Long cylinder (20")	LED9035K	Per head: 2W LED 3500K CRI 90+ 330 nominal lumens
SNR4SM	4 heads - Small cylinder (12")	SNR9SM	9 heads - Small cylinder (12")		
SNR4MD	4 heads - Medium cylinder (16")	SNR9MD	9 heads - Medium cylinder (16")		
SNR4LG	4 heads - Long cylinder (20")	SNR9LG	9 heads - Long cylinder (20")		
SNR5SM	5 heads - Small cylinder (12")	SNR13SM	13 heads - Small cylinder (12")		
SNR5MD	5 heads - Medium cylinder (16")	SNR13MD	13 heads - Medium cylinder (16")		
SNR5LG	5 heads - Long cylinder (20")	SNR13LG	13 heads - Long cylinder (20")		

CANOPY		DIMMING		VOLTAGE		FINISH	
C12	Round canopy 12" Ø x 1.5" H <i>Compatible with SNR3 or SNR5</i>	D010	0-10V 1% dimming LED driver (4 wires)	120V/277V	120V-277V Universal voltage electronic LED driver	01	White paint
C18	Round canopy 18" Ø x 2" H <i>Compatible with SNR7, SNR9 or SNR13</i>	PHS	Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i>	120V	Electronic LED driver (PHS Phase dimming)	02	Black paint
S7	Square canopy 7.75" x 7.75" x 1.5" <i>Compatible with SNR4 or SNR5</i>	NODIM	No dimming option required			08	Dark mat bronze paint
S12	Square canopy 12" x 12" x 1.5" <i>Compatible with SNR5 or SNR9</i>					21	Polished gold plated
						22	Brushed gold plated
						24	Brushed nickel plated
						31	Polished nickel plated

CUSTOM MODIFICATIONS


- Customizable head selection with mix head options
- Longer cables available
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Emergency battery pack available
- Custom sizes, configuration, finishes and lamping
- Remote driver

STIXX NANO Chandelier


PRODUCT SPECIFICATION




TECHNICAL DRAWING(S)

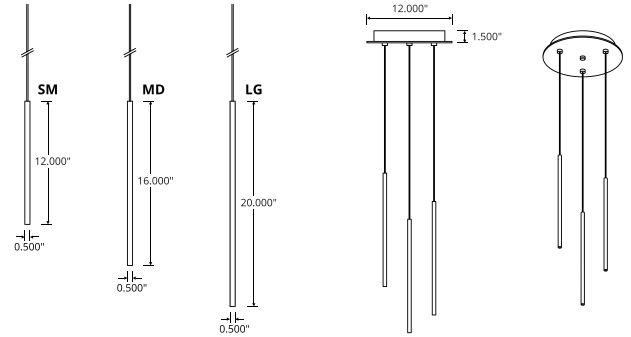


CYLINDER SIZES




SNR3_C12



SNR5_C12



SNR7_C18



SNR9_C18

SNR13_C18/

DIMENSIONS & WEIGHT

SNR3_C12	H: 83" to 110" W: 12" Ø Net Wt. 7 to 8 lbs.
SNR5_C12	H: 83" to 110" W: 12" Ø Net Wt. 8 to 9 lbs.
SNR7_C18	H: 83" to 110" W: 18" Ø Net Wt. 15 to 16 lbs.
SNR9_C18	H: 83" to 110" W: 18" Ø Net Wt. 16 to 18 lbs.
SNR13_C18	H: 83" to 110" W: 18" Ø Net Wt. 19 to 22 lbs.
SNR4_S7	H: 83" to 110" W (A): 7.75" W (B): 7.75" Net Wt. 6 to 7 lbs.
SNR5_S7	H: 83" to 110" W (A): 7.75" W (B): 7.75" Net Wt. 7 to 8 lbs.
SNR5_S12	H: 83" to 110" W (A): 12" W (B): 12" Net Wt. 11 to 12 lbs.
SNR9_S12	H: 83" to 110" W (A): 12" W (B): 12" Net Wt. 14 to 16 lbs.

OTHER SPECIFICATIONS

- Dual conductor coated coaxial class 2 adjustable cables 3/32" Ø X 72"
- Overall heights (SM = 83") - (MD = 96") - (LG = 110")
- C12 includes a painted mounting canopy 10" Ø x 1.5"
- C18 includes a painted mounting canopy 16" Ø x 2"
- S7 includes a painted mounting canopy 7" x 7" x 1.5"
- S12 includes a painted mounting canopy 10.5" x 10.5" x 1.5"
- UL Certified and suitable for damp location

INSTALLATION REQUIREMENTS

- Driver(s) concealed within canopy
- Mounts to a standard 4" octagonal electrical junction box or plaster ring

LIGHT SOURCE SPECIFICATIONS


- Electronic constant current LED power supply
- Consistent binning that falls within 3 MacAdam ellipse
- LED Life, L70 > 50 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

COMPATIBLE DIMMER LIST


Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming

STIXX NANO Chandelier


PRODUCT SPECIFICATION

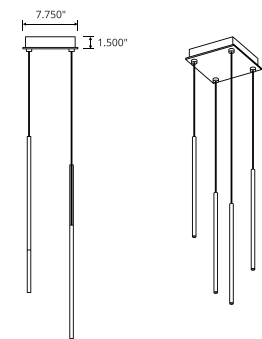


SNR4_S7



SNR5_S7



SNR5_S12




SNR9_S12

STIXX NANO Chandelier

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

LED9035K (PER HEAD)
Nominal LED Source Wattage: 3W
System wattage: 3.6W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 69.1 lm
Luminaire efficacy: 18.6 lm/w

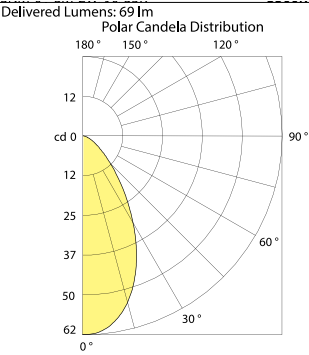

COLOR TEMP. MULTIPLIER	
2700K	0.90
3000K	0.95
3500K	1.00
4000K	1.04

CUSTOM CHANDELIERS

Elevate your space with a chandelier crafted exclusively for you. From bespoke canopy dimensions to impeccably tailored cable lengths and sculptural 3D forms, we design luminous installations that transform your project into a statement of sophistication.

