

CHLOE Wall Sconce

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Hand-blown white opal satin glass shade 6.5" Ø x 3.25" H
- Painted reflecting saucer
- LED available with multiple dimming options
- LED engine CRI 90+ available in 2700K | 3000K | 3500K
- ADA compliant
- 5 year product warranty on LED products
- Rated for damp location

Project

Type

Quantity

Note



PRODUCT CODE		LIGHT SOURCE	
CEWSM	Small Chloe Wall Sconce - 10" Ø X 3.938" P Shade	LED9W27K90	Per head: 9W LED 2700K CRI 90+ 1275 nominal lumens
CEWMD	Medium Chloe Wall Sconce - 16.75" Ø X 3.938" P Shade	LED9W30K90	Per head: 9W LED 3000K CRI 90+ 1310 nominal lumens
CEWLG	Large Chloe Wall Sconce - 24" Ø X 3.938" P Shade	LED9W35K90	Per head: 9W LED 3500K CRI 90+ 1315 nominal lumens

DIMMING		VOLTAGE		FINISH	
D010	0-10V 1% dimming LED driver (4 wires)	120V/277V	120V-277V Universal voltage electronic LED driver	01	White paint
PHS	Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i>	120V	Electronic LED driver (PHS Phase dimming)	02	Black paint
NODIM	No dimming option required <i>details</i>			08	Dark mat bronze paint
				12	Antique gold paint

CUSTOM MODIFICATIONS


- Emergency battery pack available
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Customizable finishes, sizes and LED specifications
- Remote driver

REMOTE DRIVER OPTION

Remote driver option requires a separate remote box. Refers to REM spec sheet for ordering details.

CHLOE Wall Sconce

PRODUCT SPECIFICATION

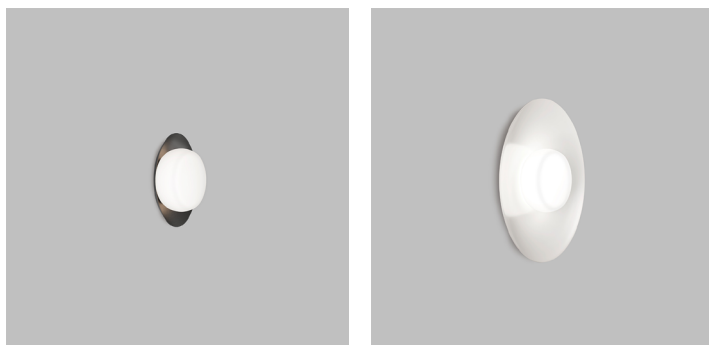

DIMENSIONS & WEIGHT

CEWSM	H: 10" W: 10" P: 3.938" Net Wt. 3 lbs.
CEWMD	H: 16.75" W: 16.75" P: 3.938" Net Wt. 4 lbs.
CEWLG	H: 24" W: 24" P: 3.938" Net Wt. 5 lbs.

OTHER SPECIFICATIONS

- Center of electrical junction box to side of fixture: CEWSM: 5" | CEWMD: 8.375" | CEWLG: 12"
- Canopy size 4.5" Ø
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box
- Mounts to a standard 4" octagonal electrical junction box or plaster ring (except for remote options)

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- Consistent binning that falls within 3 MacAdam ellipse
- LED Life, L70 > 60 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

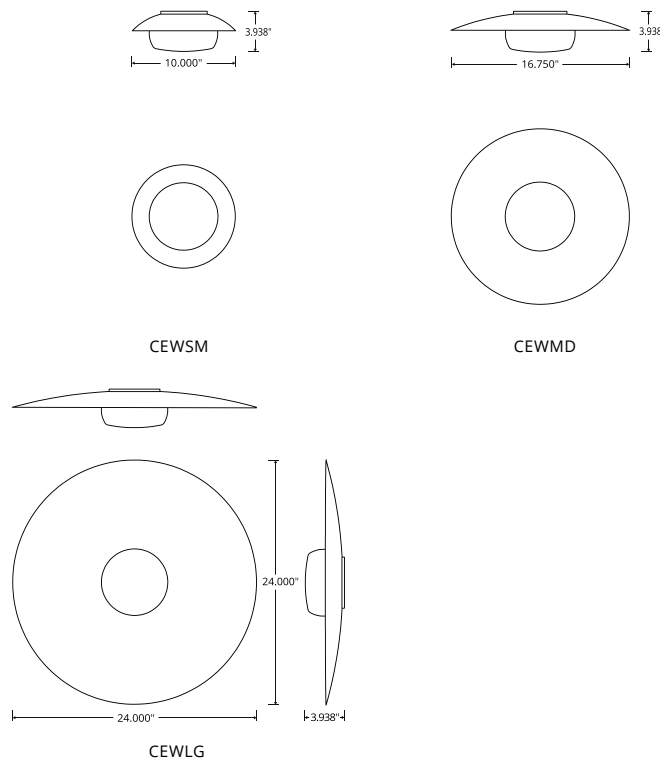

COMPATIBLE DIMMER LIST


Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming

CHLOE Wall Sconce

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

LED9W35K90 (CEWMD)
Nominal LED Source Wattage: 9W
System wattage: 11.32W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 1024.8 lm
Luminaire efficacy: 90.5 lm/w



COLOR TEMP. MULTIPLIER	
2700K	0.95
3000K	1.00
3500K	1.05
4000K	1.09