

JUPITER-2 Wall Sconce

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Hand-blown 7" Ø clear frosted glass globes
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Magnetic canopy with no apparent fastener
- Customizable sizes, finishes and LED specifications
- 5 year product warranty on LED products
- Rated for damp location



Project

Type

Quantity

Note

PRODUCT CODE	LIGHT SOURCE
JPD Jupiter-2 Wall Sconce - H: 30.25" W: 7" P: 9"	COB17W27K90 17W LED 2700K CRI 90+ 2050 nominal lumens COB17W30K90 17W LED 3000K CRI 90+ 2165 nominal lumens COB17W35K90 17W LED 3500K CRI 90+ 2280 nominal lumens COB17W40K90 17W LED 4000K CRI 90+ 2375 nominal lumens


DIMMING	VOLTAGE	FINISH
D010 0-10V 1% dimming LED driver (4 wire) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i> NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 12 Antique gold paint 21 Polished gold plated 22 Brushed gold plated 24 Brushed nickel plated 31 Polished nickel plated 33 Black polished nickel plated

CUSTOM MODIFICATIONS


- Emergency battery pack available
- Dali control protocol or Lutron EcoSystem/3-wire dimming
- Customizable finishes, sizes and LED specifications
- Remote driver

JUPITER-2 Wall Sconce

PRODUCT SPECIFICATION

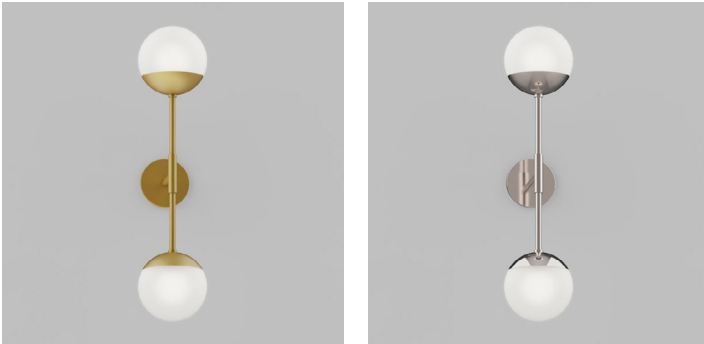

TECHNICAL DRAWING(S)



DIMENSIONS & WEIGHT

JPD H: 30.25" W: 7" P: 9" Net Wt. 10 lbs.

OTHER SPECIFICATIONS

- Center of electrical junction box to top of fixture 15.125"
- Standard canopy size is 5" Ø x 0.25" H
- UL Certified and suitable for damp location

INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box
- Mounts to a standard 4" octagonal electrical junction box or plaster ring
- Wall mounts horizontally or vertically, also mounts to ceiling

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

© COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming